




Silentline® Baffles

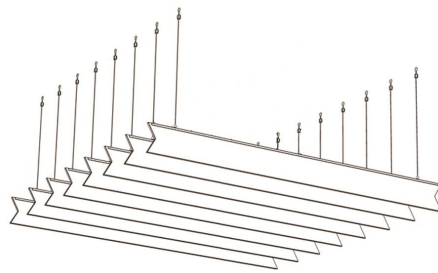

SL-95K-Transit-White-100-CG

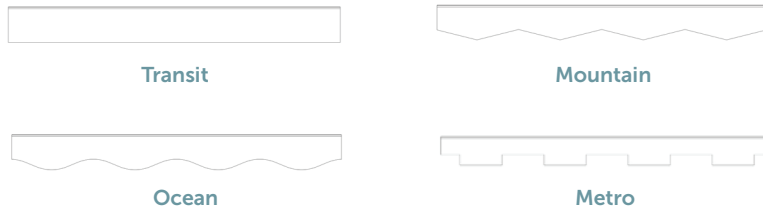

HARDWARE AND ATTACHMENT OPTIONS



I-Lag



Cable Gripper Kit



(FH) F-Snap High



(FL) F-Snap Low



(TH) T-Snap High



(TL) T-Snap Low

APPLICATIONS AND USAGE

Installs to standard 5/8" T-Grid or Bolt Slot suspension system, or can be hung independently with C-channel, paired with I-lags, or cable gripper stainless steel hardware.

PANEL SPECIFICATIONS

Thickness	1/2"	1"	2"
NRC	0.75	0.95	1.20
Size	47"	95"	
Height	8"	12"	

(Spacing 12" on center)

ENDS



A-Angled S-Square C-Curved K-Chevron

STANDARD COLORS



- UL Certified for no VOC's
- LEED & LBC Product Declarations
- Absorbing Sound Beautifully For A Lifetime

Declare



TVOC UL
0.5mg/m³
or less

STATEMENT OF HAZARDOUS NATURE

Classified as Non-hazardous according to OSHA29C-FR1910.1200

FIRST AID INFORMATION

SWALLOWED: Give a glass of water & seek medical advice.
SKIN: Brush off. EYE: If the product comes into contact with the eye, immediately hold the eye open and wash with fresh water. If pain persists seek medical advice.

FIRE FIGHTING MEASURES

Alert fire department of location and nature of fire. Extinguish with water, fog, foam, or dry chemical. Product includes carbon monoxide. Material will shrink away from flame and may drip.

PRODUCT DESCRIPTION

Non-woven, thermally bonded 100% polyester fiber panel. 65% recycled content, 100% recyclable. Class A Fire Rating per ASTM E84. CAS # 68604-67-1. Noise Reduction. Coefficient (NRC) 1.20 per ASTM C423-09a.

HANDLING AND STORAGE

Do not compress or bend product or package. Segregate from strong oxidizers. Keep covered, clean and dry.

CLEANING & MAINTENANCE

Can be cleaned and maintained as follows: brush off, blow off with compressed air, clean by using a dry cleaning sponge, damp white cloth or similar. Heavy soiling or stains may require a cleaner similar to Resolve Carpet Cleaner or Spot Shot which should be used as directly. Heavily damaged panels should be replaced.

LIMITED ONE-YEAR WARRANTY

F-SORB® has a limited One-Year Warranty. This warranty covers defects in the structural integrity of the panels. This warranty does not cover damage caused by fire, water, accident, or by any form of abuse.

1 (844) 313-7672
www.fsorb.com

